

Unlocking Options on an 860 DSPi

The following steps are required to unlock a feature on the 860 DSPi:

Using the buttons on the 860 DSPi's keypad, navigate to the **Setup** menu, then the **Info** icon, and then press the **Enter** button.

On the **Info** screen, press the soft key corresponding to either **RF Option** or **Net Option**, depending upon which option is to be unlocked.

From the appropriate menu, press the **Down** arrow key to select the desired option then press the **Enter** button.

NOTE: Previously installed options will have an asterisk beside them.




As shown below, the **Enter Option Code** window will appear. Using the numeric keypad, enter the 12-digit option code then press the **Enter** button.

The option is now activated.

NOTE: It may be necessary to reboot the 860 DSPi after activating an option.

If the icon for the option that was just activated is not available on any menu (ensure that all menus have been checked for the option icon) use the **Arrow** buttons on the keypad to navigate to the **Setup** menu, then the **Files** icon, and then press the **Enter** key.

Press the **Function (Fn)** key then navigate to highlight the **Restore Icons** option on the **Function** menu, then press the **Enter** button. This operation will replace any missing or deleted icons on the 860 DSPi.

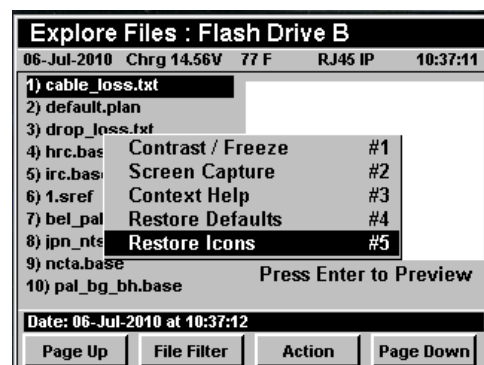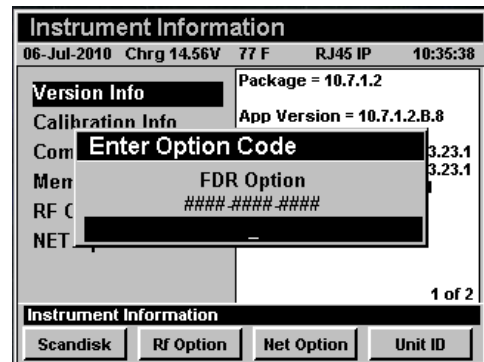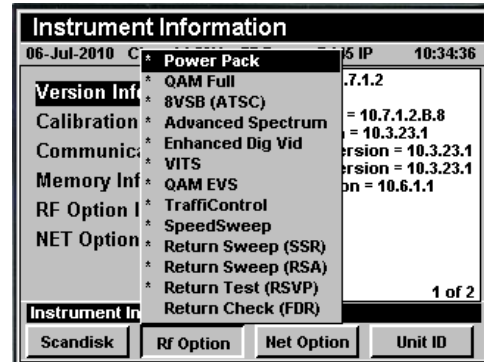

For Additional Help Contact
 Trilithic Applications Engineering
 1-800-344-2412 or 317-895-3600
support@trilithic.com or
www.trilithic.com